


Confined Space *Ventilation*

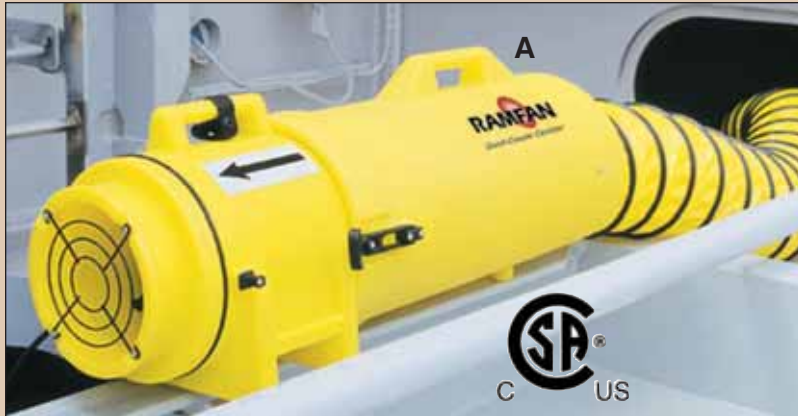

RAMFAN Ramfan Turbo Blower/Exhausters

Versatile and convenient portable blowers feature rugged double-wall, molded polyethylene casings and polypropylene fan blades that will outlast sheet or cast metal models by years. Ultra quiet (74dB) 8" blowers deliver the highest CFM in their class and will meet the most demanding work conditions. The detachable **Quick-Couple™ Canister** option conveniently stores either 15' or 25' of collapsible duct and permits reversal from discharge to suction in seconds. Listed for outdoor use to CSA/UL standards. **This product will ship separately, direct from the manufacturer.**

- A. 84500** 15' Duct Blower/Exhauster, 115VAC
Airflow: Free Air – 980 CFM, 1-90° Bend – 789 CFM, 2-90° Bend – 666 CFM **\$762.65**
- 84501** 25' Duct Blower/Exhauster, 115VAC
Airflow: Free Air – 980 CFM, 1-90° Bend – 722 CFM, 2-90° Bend – 614 CFM **795.20**
- B. 84502** Blower/Exhauster, 115VAC
Airflow: Free Air – 980 CFM **508.60**



ECKO Plastic Ventilation Fan

This compact plastic blower runs quietly and boasts an airflow rate of 980 CFM. Unit is constructed of a polyethylene housing, a 9-blade polypropylene impeller and a steel grill. Duct canisters feature a quick-connect duct coupling system for easy attachment to the blower. Canisters also store and protect the duct. UL approved motor.



- 33717** 8" Plastic Blower, 115VAC, Airflow: Free Air – 980 CFM, 1-90° Bend – 789 CFM, 2-90° Bend – 666 CFM **\$314.00**
- 33718** 8" Plastic Blower with 15' Duct **336.40**
- 33719** 8" Plastic Blower with 25' Duct **381.90**



ECKO Ventilation Fans

Get fast, efficient fresh air ventilation when and where you need it. The rugged steel housing and cast aluminum impeller are built to last. **12" Blower** features a sure-grip handle with built-in on/off switch. **Flexible Ducting** is rated from -20 – 180°F and can be stored in a **Storage Bag** (sold separately). **This product will ship separately, direct from the manufacturer.**

- 83973** 8" Blower, 115VAC, Airflow: Free Air – 882 CFM, 1-90° Bend – 675 CFM, 2-90° Bend – 550 CFM **\$291.40**
- 83974** 8" X 15' Ducting **161.10**
- 33721** 8" X 25' Ducting **267.80**
- 33720** 8" Duct Coupler **36.40**
- 33724** 12" Blower, 115/230VAC, Airflow: Free Air – 2,280 CFM **400.60**
- 33726** 12" X 16' (5m) Ducting **279.10**
- 33727** 12" X 33' (10m) Ducting **436.40**
- 33725** 12" Duct Coupler **47.35**
- 33728** Bag for 8" X 15', 8" X 25' and 12" X 16' Ducting **52.50**
- 33729** Bag for 12" X 33' Ducting **64.10**



MILLER
by SPERIAN **Manhandler™ System**
with 65' Galvanized Cable Winch

This system is the perfect solution for a range of applications including confined space entry, rescue, positioning and personnel/material handling. Secondary breaking system in the handle prevents free wheeling. Aluminum tripod adjusts from 84" – 89¾" and has adjustable legs with integral push pins, rubber skid pads, and serrated edges to prevent slipping. Maximum working load is 350 lbs. Unit includes 65' galvanized cable winch, tripod, mounting bracket, pulley, carabiner and carrying bags for tripod and winch. Meets applicable OSHA and ANSI requirements. **This product is made-to-order and therefore non-returnable. This product will ship separately, direct from the manufacturer.**

- 87064 Manhandler System with 65' Galvanized Cable Winch . . . \$2,325.00
- 15366 Manhandler Winch Only, 65' Galvanized Cable. 1,525.00
- 15367 Manhandler Winch Only, 65' Stainless Steel Cable. 1,695.00



SALA
Rescue and Retrieval System

Safely raise or lower workers with this dependable, lightweight system. Winch with self-adjusting disk brake will stop a fall within inches and limit the arresting forces to 900 lbs. or less. Sealed self-retracting lifeline isolates components from foreign elements, resulting in an extremely dependable device. In retrieval mode, a brake will prevent movement of the load if the operator accidentally releases the handle. Unit includes tripod, cable, winch and winch carrying bag. **Retrieval Systems are made-to-order and therefore non-returnable. Meets applicable OSHA and ANSI standards.**

- 7' Tripod**
- 15691 50' Galvanized Cable. \$4,998.00
 - 15712 85' Galvanized Cable. 5,395.00
 - 15692 50' Stainless Steel Cable. 5,123.00
 - 15713 85' Stainless Steel Cable. 5,560.00
- 9' Tripod**
- 15693 50' Galvanized Cable. 5,215.00
 - 15714 85' Galvanized Cable. 5,635.00
 - 15694 50' Stainless Steel Cable. 5,425.00
 - 15715 85' Stainless Steel Cable. 5,887.00
- 15324 Work Winch 441.00
 - 15344 Tripod Mounting Bracket. 47.95
 - 15381 Leg Mount Pulley. 171.20
 - 15325 Bag for 7' Tripod 166.30
 - 15326 Bag for 9' Tripod 154.25





ALLEGRO
INDUSTRIES

Heavy-Duty Vinyl Umbrellas

Strap these heavy-duty vinyl umbrellas to a manhole guard rail or push them into the ground for effective protection from sun and rain. **Economy Umbrella** features a 84" two-part wood pole and measures 68" in diameter. **Tiltable Deluxe Umbrella** features a 92" two-part metal pole and measures 84" in diameter.

- 15023 Economy Umbrella \$221.95
- 15011 Deluxe Umbrella 324.45



Salalift Requires
No Annual Factory
Certification

DBI SALA® Salalift® II Confined Space Rescue System

This confined space rescue system is designed with durability and reduced weight in mind and can be used for raising, lowering, work support or personnel rescue. The complete system is rated at 350 lbs. for working loads and 310 lbs. for fall arrest. Winch speed: 12¾' per minute. Unit includes 7' tripod, 60' galvanized cable winch and winch carrying bag. Meets applicable OSHA and ANSI standards. **This product is made-to-order and therefore non-returnable. This product will ship separately, direct from the manufacturer.**

- 89986 \$2,475.85



ALLEGRO
INDUSTRIES **Work Tent**

This utility shelter springs from a backpack into a full size tent in seconds. An open bottom allows for protection while working over manhole covers or excavation sites. Tent is constructed of water-resistant, flame-retardant nylon and spring steel and comes with twelve 9" plastic stakes. Unit measures 6'D X 6'W X 7'H and weighs 22 lbs.

- 20259 \$391.00

ALLEGRO
INDUSTRIES

Manhole Guard Rail and Shield

This 42" high **Manhole Guard Rail** is constructed of .078 gauge steel and designed to protect a 33" X 33" area. Unit weighs 34 pounds and is powder-coated in safety yellow for high visibility. Rail locks open and two hooking chains provide protected entry and exit. Unit requires no tools or assembly. **Manhole Shield** will fit 27", 30" and 32" diameter manholes with an inflatable seal that ensures a watertight seal. This polyethylene shield is 12" tall to keep water and mud out of the manhole as you work.



- 80176 Manhole Guard Rail \$272.80
- 80180 Manhole Shield 216.30