


## DISS Cylinder Connections for High Purity Gases

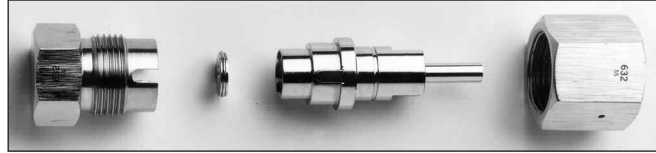

### Description

DISS (Diameter Index Safety Standard) cylinder connections are used in the Semiconductor Industry where the highest levels of purity and the lowest leak rate connections are required. Standard DISS connections are available in models that connect to the cylinder and convert to 1/4" MPT, 1/4" tube stub, or 1/4" face seal male (note: face seal is VCR compatible). All models are made from 316L stainless steel and are supplied with a nickel sealing gasket.

### Ordering Information

CGA	CGAx 1/4" MPT Male	CGAx 1/4" Tube Stub	CGAx 1/4" Face Seal Male
632	DISN-632	DIST-632	DISV-632
634	DISN-634	DIST-634	DISV-634
636	DISN-636	DIST-636	DISV-636
638	DISN-638	DIST-638	DISV-638
640	DISN-640	DIST-640	DISV-640
642	DISN-642	DIST-642	DISV-642
712	DISN-712	DIST-712	DISV-712
714	DISN-714	DIST-714	DISV-714
716	DISN-716	DIST-716	DISV-716
718	DISN-718	DIST-718	DISV-718
720	DISN-720	DIST-720	DISV-720
722	DISN-722	DIST-722	DISV-722
724	DISN-724	DIST-724	DISV-724
726	DISN-726	DIST-726	DISV-726
728	DISN-728	DIST-728	DISV-728

*Non-Rotating Blank Male Plug for all CGA 630/640 connectors - Model DISB-630*

*Non-Rotating Blank Male Plug for all CGA 710/720 connectors - Model DISB-710*

*Shipping Weight: 1 lb*

### DISS Washers

Model No.	Description
GSK-0045-AO	Replacement Aluminum Gasket for Carbon Monoxide Service
GSK-0045-NI	Replacement Nickel Gasket for all CGA 630/640 and CGA 710/720 connectors