

MATHESON *Select*® Shielding Gas HC-725 for GMAW on Nickel-based Alloys: Stainless Steel, Inconel®, Hastelloy®, Monel®

One shielding gas ideal for all: short arc, spray and pulsed spray; improved operator appeal and safety

This optimized composition of He, CO₂, and Ar, uses Argon (not Helium) as the principal component to produce a high quality weld but at lower arc temperatures. This results in a smaller heat-affected zone, less warpage and damage to the base material, and greatly reduced hexavalent chromium emissions.

Typical challenges associated with welding nickel based alloys

- Problems with high arc temperatures
- Difficulty welding lighter gauge materials
- Sluggish filler metal transfer

Key Benefits of HC-725

- High concentration of Ar enables lower arc temperature
- Greatly reduced hexavalent chromium emissions improves operator comfort and safety
- Versatile - optimized within the wide range of 14 to 36 V
- Reduced spatter
- Reduced heat affected zone
- Single shielding gas ideal for short arc, spray, and pulsed spray application
- Limits oxide formation on weld bead surface (reduces need for re-work)
- Smaller droplet size is easier to control - improved flow
- Improved weld puddle control
- Replacement for Ar/O₂ for spray and pulsed spray welding

Other Benefits

- Excellent wettability and penetration
- Improved bead appearance
- Low oxidation potential
- Longer cylinder fill life - homogenously mixed to enable more complete usage of cylinder contents
- More cubic feet of gas per cylinder



All MATHESON *Select*® Shielding Gas Mixtures are certified to AWS A5.32 and ISO 14.175 Standards - the best choice for mixture quality, welding efficiency, and to ensure compliance in certified welding operations.

Tel: 877-684-4427
Email: info@mathesongas.com
www.mathesongas.com
Printed in USA TB167 2/2021


Copyright 2021 Matheson Tri-Gas, Inc. All Rights Reserved.

All contents of this document are subject to change without notice and do not represent a commitment on the part of Matheson Tri-Gas, Inc. Every effort is made to ensure the accuracy of this information. However, due to differences in actual and ongoing operational processes and product improvements and revisions, Matheson Tri-Gas, Inc. cannot guarantee the accuracy of this material, nor can it accept responsibility for errors or omissions. This document is intended to serve as a general orientation and cannot be relied upon for a specific operation. No warranties of any nature are extended by the information contained in these copyrighted materials.

All names, products, and services mentioned herein are the trademarks or registered trademarks of their respective organizations and are the sole property of their respective owners. Matheson and the Matheson logo are registered trademarks of Matheson Tri-Gas, Inc.


Stainless steel was welded using 90%He / 7.5%Ar / 2.5%CO₂ and with MATHESON *Select*® HC-725 as the shielding gas. High speed video was used to produce the comparisons in the still-frame images below.

Short Circuit Arc

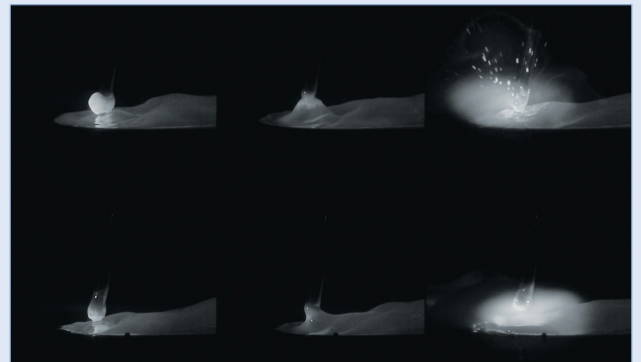

Note the large droplet formation, globular puddling, and explosive spatter in the upper series where 90%He / 7.5%Ar / 2.5%CO₂ was used. In the lower series (using HC-725 as the shielding gas), the droplet is smaller and puddling is smoother, giving the user better overall control (and a better appearance). In addition, re-ignition of the arc with HC-725 is less explosive, causing less spatter.

Normal Spray Arc

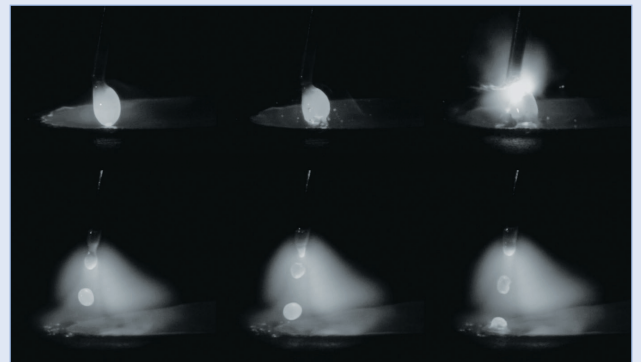

It is generally well-known that 90%He is not suitable for use with spray arc welding on stainless – these images in the series at the top help us understand why this is so. The arc plasma has a noticeable plasma shift; droplet formation is large and the transfer is explosive. The lower series of images demonstrates the suitability of HC-725 for spray arc welding. Droplet formation and transfer are smooth and consistent; and the plasma is stable.



American Welding Society
Sustaining Company Member



MATHESON
The Gas Professionals